


# MULTI-FUNCTIONAL JUMP STARTER



Designed for gas engines up to 10.0 liters and diesel engines up to 10.0 liters for small diesel cars, SUVs,boats,trucks,ATVs, motorcycles and more.



### POWER BANK

This product has 3 output ports for multiple charging demands. Such as cellphone, tablet iPad,laptop, PSP,gamepad, car vacuum cleaner (with the provided cigarette lighter converter) and more.



# SAFETY JUMP-START CLAMP

Multiple safe portection design

- 1. Reverse Connection Protection
- 2. Low Battery Protection
- 3. High Temperature Protection



### LED FLASHLIGHT

Long press the power button for 3 seconds to turn on turn off the flashlight. Quick press the power button to switch 3 flashlight modes.






























# CHARGE DEVICES

Power everything. With USB-C Power Delivery, you have the power tocharge almost everything. Its internal power bank provides 60-wattsof power both in and out to effortlessly power our favorite USB-Cdevices, like phones, tablets, laptops, wearables, and more.



# WHAT'S IN THE BOX

GK-J1205 JUMP STARTER

STORAGE BAG X1
PRODUCT X1
CHARGING CABLE X1
USER MANUAL X1
EC5 JUMPER CABLE X1
CIGARETTE LIGHTER ADAPTER X1





# PRODUT DIAGRAM


- 1 Power Button
  - WEI DULLOII
- 3 Force Mode Button

Light Mode Button

- 4 DC Output Port
- USB-A Output Port
- 6 USB-C Input/Output Port
- itput Port
  - ort 8 EC5 Port

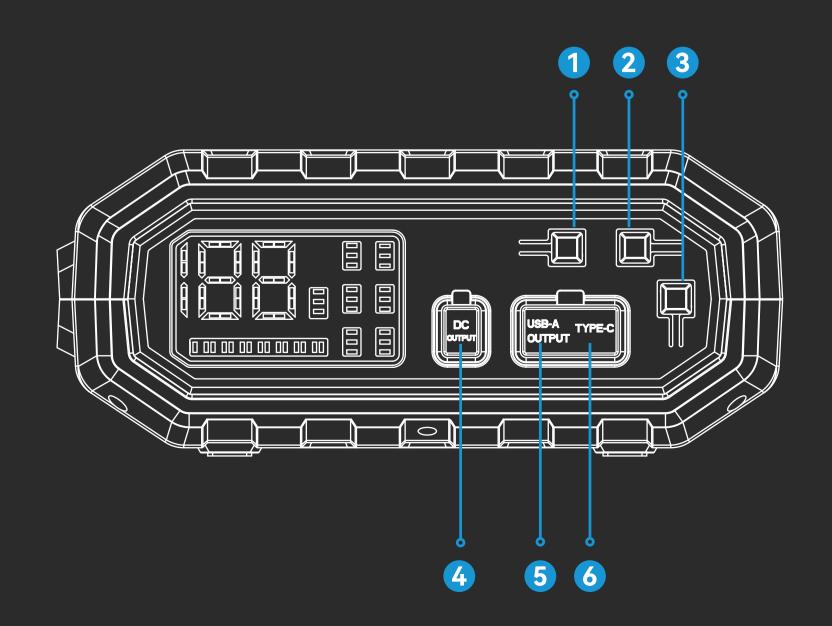

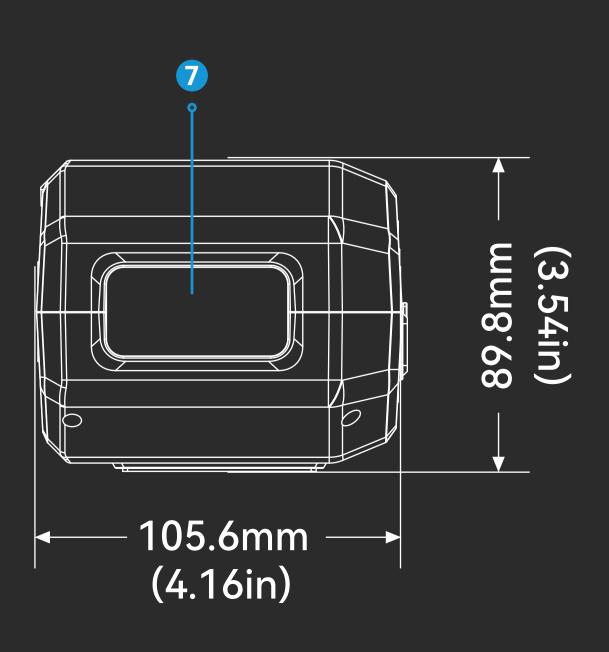

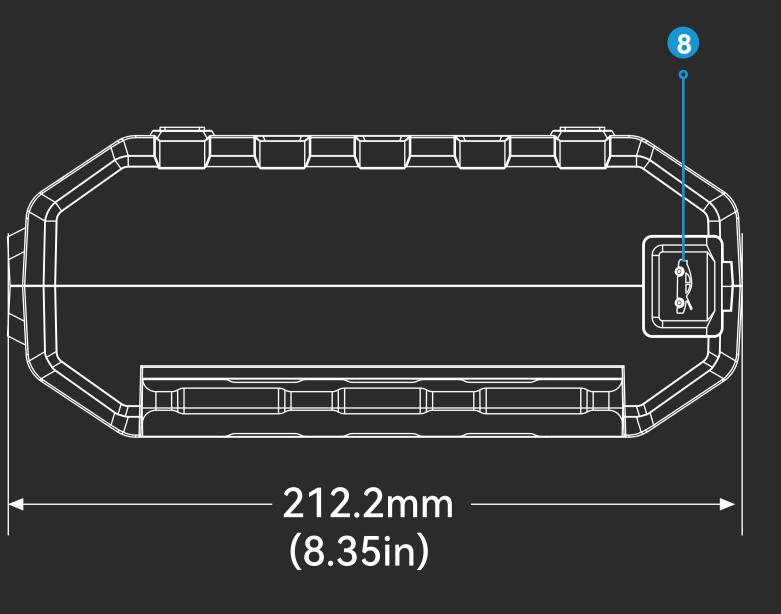

LED Light

# RECHARGE TIME

10W	11.10H
18W	6.17H
60W	1.85H

#### TECHNICAL SPECIFICATIONS

INTERNAL BATTERY TYPE	LITHIUM ION
PEAK CURRENT	4000A
STARTING CURRENT	2000A
BATTERY CAPACITY	24000AMH(88.8WH)
OPERATING TEMPRATURE	"-4°F TO +140°F (-20°C TO +60°C)"
CHARGING TEMPRATURE	"32°F TO +122°F (0°C TO +50°C)"
USB-C PROTOCOL	PD/QC3.0
USB-C (INPUT)	5V(5.0V/3A & 9V/3A & 12V/3A 15V/3A & 20V/3A)
USB-C (OUTPUT)	5V(5.0V/3A & 9V/3A & 12V/3A 15V/3A & 20V/3A)
USB-A PROTOCOL	QC3.0
USB-A1(OUTPUT)	5V(5.0V/3A & 9V/2A & 12V/1.5A)
DC PORT (OUTPUT)	12V-16.9V / MAX6A
WEIGHT	4.62 LBS (2.1 KG)
LED FLASHLIGHT	100 LUMEN
PRODUCT DIMENSIONS	212.2 X 89.8 X 105.6 MM(8.35 X 3.54 X 4.16 IN)





















Over Charge Over Current Short Circuit Reverse Polarity Low Temp High Temp Over Voltage Over Load Reverse Charge Spark Proof Protection Protection Protection Protection Protection Protection Protection Protection Protection